


Electric **Cute**

FCD-6.6/8.8/X6.6/X8.8

ES6V-Q2(H)

ES6V-XQ2(H)

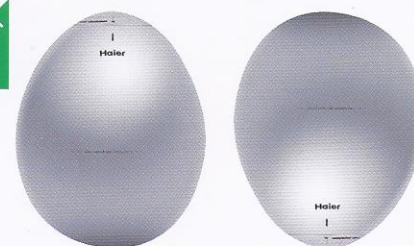

Plastic shell, Anti-corrosion, Long lasting



Above Sink/
Under Sink



Wire Remote
Control
for undersink



Safe Care-Shock
Proof



High Quality
Enamel Tank




Dual Thermostats




8bars Rated
Pressure

Model	FCD-6.6	FCD-X6.6	FCD-8.8	FCD-X8.8	ES6V-Q2(H) ES6V-XQ2(H)
Installation method	Above sink	Under sink	Above sink	Under sink	Above/under sink
Control method	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Capacity (L)	6.6	6.6	8.8	8.8	6
Rated voltage (V)	230	230	230	230	230
Rated frequency (Hz)	50	50	50	50	50
Rated power (kW)	1.65/2	1.65	1.65	1.65	2
Rated temperature (°C)	75	75	75	75	75
Rated pressure (bar)	8	8	8	8	8
Tap water pressure (MPa)	≥0.05	≥0.05	≥0.05	≥0.05	≥0.05
Water-proof grade	IPX4	IPX4	IPX4	IPX4	IPX4
Product dimensions (mm) W/H/D	246/348/273	246/348/273	255/387/283	255/387/283	266/364/285
Packing dimensions (mm) W/H/D	308/482/347	308/482/347	328/547/358	328/547/358	337/355/469
Net weight (kg)	5	5	5.5	5.5	5
Gross weight (kg)	6.5	6.5	7	7	6.5
Loading Qty. (40HQ)	1195	1195	1085	1085	1270


Back view




Front view



Side view



Cut view



*Dimensions (mm)

Model	Capacity(L)	A	B	C	D	E
ES6V-Q2(H)	6	100	364	266	100	285